CRATHCO Autofill

No More Refilling. No More Downtime.

NEW I-PRO Autofill Lids designed to instantly automate your current I-PRO system and your beverage programs.



Ideal for Bag-in-Box & In-House Concentrate Programs

CRATHCO



I-PRO AUTOFILL LID

Streamline Beverage Operations


Replace your current I-PRO lid with Crathco's Autofill Lid System. Your frozen offerings will always be fresh and available, enticing customers all day long.

- Increased Visual Appeal always available, increasing sales
- Enhanced Accuracy and Consistency automatically adds the perfect amount of water and syrup every time
- **Reduced Labor** keeps staff focused on customers
- Minimizes Training simple set-up and operation
- **Reduced Downtime** manual re-filling is time-consuming
- Increased Food Safety minimal exposure to product
- **Seamless Integration** update existing equipment or your entire system
- Waste Reduction prevents loss from incorrectly mixed product
- **Versatile** perfect for BIB or in-house syrup programs



Crathco Autofill Lid
Puts a Lid on Labor



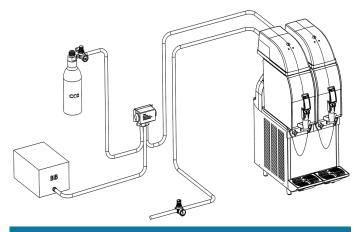

HERE'S HOW AUTOFILL WORKS

- Automatically senses drink volume through integrated lid sensor.
- When level falls below the probe, fill tube automatically refills the bowl with the perfect blend of BIB syrup and water.
- Post Mix process mixes beverage syrup in the bowl.
- "Sold Out" switch alerts operator (by red indicator lights) syrup is low or water connection needs attention.
- Beverage syrup ratio can be set to specific needs.
 Controlled by gas pressure and reducing valve.
- Air gap of greater than 1" between water supply outlet and maximum beverage level prevents backflow.

SPECIFICATIONS

Model	Description	Electrical	Product Dimensions $H \times W \times D$	Shipping Dimensions H x W x D	Product Wt.	Shipping Wt.
LV600697	Autofill I-PRO AFI-P2-16, Black*	120V 60hz 1ph 3A	10.6" x 7.4" x 15.8"†	18.3" x 19" x 11.3"	P2 - 6.86 lbs	16 lbs
LV606106	Autofill I-PRO AFI-P3-16, Black**	120V 60hz 1ph 3A	10.6" x 7.4" x 15.8"†	19" x 24.8" x 11.3"	P3 - 10.29 lbs	22.7 lbs
LV606116	Body Assembly Autofill I-PRO Black	120V 60hz 1ph 3A	10.6" x 7.4" x 15.8"†	19" x 24.8" x 11.3"	4 lbs.	8 lbs.

^{*}Parts included: 2 Bottom Covers, 2 Top Covers, 1 Jack Power Cable, 1 AC Power Supply 12V, 2 water regulators, 4@1/4" fitting threads, 2 pressure gauges, 4@3/8" elbow coupling connectors

Water Supply: Min 30psi/Max 120psi • CO₂: Max 60psi • Low Pressure Cut-Off: <5psi • Compatible with Existing I-PRO 2 Units — 2M w/Light Panel | 2E w/Light Panel | 3M w/Light Panel |

†Includes Water Level Probe





^{**}Parts included: 3 Bottom Covers, 3 Top Covers, 2 Jack Power Cables, 1 AC Power Supply 12V, 3 water regulators, 6@1/4" fitting threads, 3 pressure gauges, 6@3/8" elbow coupling connectors